

FS DC KANTELAAR

Specificaties

Usable Jaw Opening	Ramp Loaded Tables: 2.00m max 0.64m min Floor Flush Tables: 2.00m max 0.74m min
--------------------	------------------------------------------------------------------------------------

Increased jaw opening models also available

Standard Load Tables	Ramp Loaded Tables: Width 1.30m Depth 1.30m Floor Flush Tables: Width 1.40m Depth 1.30m
----------------------	--------------------------------------------------------------------------------------------

Normally supplied with 1.20m long loading ramp

Loading Capacity	2000 kgs
------------------	----------

Power Supply	3ph / 400V / 20A
--------------	------------------

Motor Size	4.0kW
------------	-------

Weight	2255 kgs
--------	----------

Weight of Guards	175 kgs
------------------	---------


Controls	Extended individual push button controls with semi or fully auto-sequenced systems available as an option
----------	--------------------------------------------------------------------------------------------------------------

Operating Space (including attached guards)	A Width 2.80m
	B Depth 2.30m
	C Height 2.48m

Depth increases to 3.31m when fitted with floor fixed guards and multi photo-beams

Standard Shipping Dimensions (with guards fitted)	Width 2.80m Depth 2.30m Height 2.20m
------------------------------------------------------	--------------------------------------------

SIDE ELEVATION

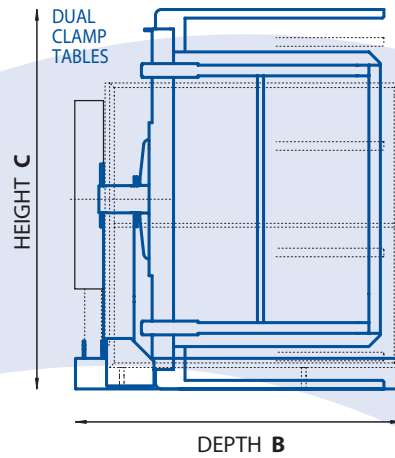

PLAN VIEW

